Harris Corporation expressly reserves the right to supplement or modify these Disclosures as appropriate upon receipt of further information and discovery. The Huawei '678 Patent Accused Products (as that term is defined and the corresponding devices are identified in Harris's P.R. 3-1 and P.R. 3-2 disclosures cover pleading) infringe at least the following claims. References to instrumentalities in this chart are exemplary only and should not be construed as limiting the scope of any claim of the '678 patent. The Huawei '678 Patent Accused Products satisfy each claim element below literally. The Huawei '678 Patent Accused Products also satisfy claim elements under the Doctrine of Equivalents, including without limitation where specifically identified below, because they include and perform substantially similar functionality.


'678 PATENT CLAIM 12	Infringement By Huawei Corporation
A wireless local or metropolitan area network comprising:	The Huawei '678 Patent Accused Products infringe this claim. Huawei makes, uses, sells, offers to sell and/or imports equipment used in wireless local or metropolitan area networks, including its WLAN products and consumer devices, and on information and belief, makes, uses, sells, offers to sell and/or imports wireless local or metropolitan area networks in the United States.
	Without the benefit of discovery, Harris identifies exemplary networks, including, without limitation, networks deployed at Huawei's 13 U.S. facilities; networks deployed in CloudCampus solutions such as those deployed for Cloud4Wi, in San Francisco, CA; other enterprise networks deployed for Weichai Power in Chicago, Ill., and Crowley Independent School District in Crowley, Tx.
	On information and belief, Huawei's United States Offices utilize the Huawei WLAN products to form a wireless local or metropolitan area network (Wireless LAN/MAN). These offices include Huawei Technologies USA, Inc. HQ's offices in Plano, Texas; Broomfield, CO; Houston, TX, Reston, VA; Philadelphia, PA; Irvine, CA; Cupertino, CA; Huawei Device USA, Inc. HQ's offices in Plano, Tx; Bellevue, WA; Mountain View, CA; Alpharetta, GA; Bridgewater, NJ; Santa Clara, CA; and San Diego, CA, as well as Futurewei Technologies, Inc.'s offices in Santa Clara, CA; Plano, TX, Bridgewater, NJ; Rolling Meadows, IL; Greensboro, NC; Louisville, CO; San Diego, CA; and Bellevue, WA. https://www.huawei.com/us/contact-us#office

'678 PATENT CLAIM 12	Infringement By Huawei Corporation					
	Further, in solution.	2017, Huawei partr	nered with Cloud4Wi in S	San Francisco Calif	fornia to install its CloudC	Campus
	See					

'678 PATENT CLAIM 12	Infringement By Huawei Corporation				
	To fully unlock the value of campus networks, you need these products				
	Switch Fast deployment, secure and reliable easy O&M, and agile innovation WLAN All-scenario, customized Wi-Fi & toT integration				
	AP4050DN-E AP4051DN & AP4151DN AP8050DN & AP8150DN				
	http://e.huawei.com/topic/cloudcampus-en/index.html				



'678 PATENT CLAIM 12	Infringement By Huawei Corporation				
	eSight Overview Presentation at 6. On information and belief, all Huawei WLAN products incorporate the Wireless Intrusion Detection System (WIDS) as described, for example in the WIDS and WIPS Technology White Paper: "The Wireless Intrusion Detection System (WIPS) functions monitor and prevent the preceding attacks on WLANs. This document describes WIDS and WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 1.				

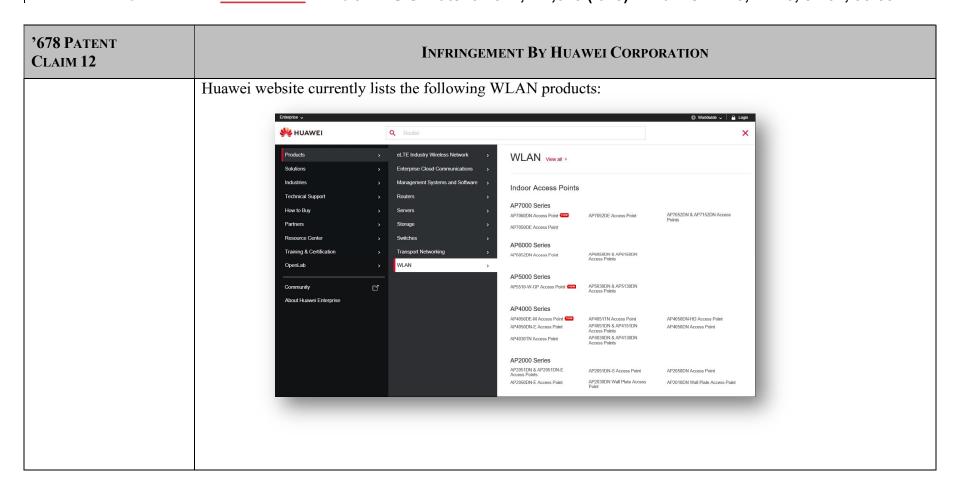

'678 PATENT CLAIM 12	Infringement By Huawei Corporation				
	Indoor Access Points				
	AP7000 Series AP7060DN Access Point AP7052DE Access Point AP7052DN & AP7152DN Access Point Points				
	AP7050DE Access Point				
	AP6000 Series AP6052DN Access Point AP6050DN & AP6150DN Access Points				
	AP5000 Series AP5010-W-GP Access Point AP5030DN & AP5130DN				
	AP4000 Series				
	AP4050DE-M Access Point AP4051DN & AP4051DN & AP4050DN-HD Access Point AP4050DN-E Access Point ACcess Point ACcess Point ACCES Point ACCESS POINT AC				
	AP4030TN Access Point AP4030DN & AP4130DN Access Points AP4030TN Access Points				
	AP2000 Series AP2051DN & AP2051DN-E AP2051DN-S Access Point AP2050DN Access Point AP2050DN Access Point				
	AP2050DN-E Access Point AP2030DN Wall Plate Access AP2010DN Wall Plate Access Point Point AP2050DN-E Access Point				
	AP1050DN-S Access Point				

'678 PATENT CLAIM 12		Infring	EEMENT BY HUAWE	I CORPORATION	
		Outdoor Access Poin AP8082DN & AP8182DN Access Points AP8030DN and 8130DN Access Points	AP8050TN-HD Access Point AP6510DN-AGN and AP6610DN-AGN 802.11n Outdoor Access Points	AP8050DN & AP8150DN Access Points	
		Access Controllers AC6805 Access Controller AC6508 Access Controller X1E Series Native Wireless Access Controller Card S5730-HI Series Next- Generation Gigabit Agile Switches	AC6800V Access Controller AC6005 Access Controller ACU2 Wireless Access Controller Unit S5720-HI Series Agile Fixed Switches	AC6605 Access Controller AC6003 Access Controller S6720-HI Series Full-Featured 10 GE Routing Switches	
		Scenario-specific prod AD9431DN-24X Central Access Point R240D & R230D Remote Units R450D Remote Unit	duct series AD9430DN-24 Central Access Point R251D & R251D-E Remote Units AP9131DN & AP9132DN Access Points	AD9430DN-12 Central Access Point R250D & R250D-E Remote Units	
	See also, e.g., Huawe	ei Access Point Datash	neets ("Rogue device	(as of March 13, 2019). The monitoring Huawei APs of management on the rogi	1.1
	security guarantees for all APs support WID AP8050DN & AP815	or air interface enviro S, see also, e.g., AP20 50DN at 3; AP6052D	onment and wireless 030DN at 2; AP4050 N at 4; AP6050DN&	data transmission.") On i DDN-E at 3; AP4051DN & &AP6150DN at 4. <u>See als</u> e/en/wlan/ap3050de-pid-	information and belief, & AP4151DN at 3;

Case 2:18-cv-00439-JRG Document 92-12 Filed 08/27/19 Page 9 of 95 PageID #: 2613

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	23482930?offeringId=21946538, at 13 ("Wireless intrusion detection system (WIDS) and wireless intrusion prevention system (WIPS), including rogue device detection and countermeasure, attack detection and dynamic blacklist, and STA/AP blacklist and whitelist"); Huawei AP7060DN Access Point Data Sheet, available at https://e.huawei.com/en/related-page/products/enterprise-network/wlan/indoor-access-points/ap7060dn/wlan-ap7060dn, at 3 ("Huawei APs support WIDS/WIPS,"). See also, Huawei Enterprise AP Series 802.11ac Brochure:
	For enterprise networks of different types and scales, Huawei offers the following AP models: 802.11ac indoor 7X30 series and 5X30 series APs, outdoor 802.11ac 8X30 series APs, and 802.11ac AP9130DN vehicle-mounted APs specially designed for rail transit communications.

Table 5-2 Features of Hu	awei 802.11ac APs			
Huawei 802.11ac AP	AP5030DN/ AP5130DN	AP7030DE	AP8030DN/ AP8130DN	AP9130DN
Target market	Mid-range market: small- to medium-sized enterprises	High-end market: medium- to large- sized enterprises	Large campus outdoor coverage or backhaul	Rail transit
Working mode	Fit/Fat AP	Fit AP	Fit/Fat AP	Fat AP
Dying gasp	9	J	√	√
Wireless positioning/ Real-Time Location System (RTLS)	4	✓	4	
Spectrum analysis	J	√	4	2
Seamless roaming	J	4	V	4
IPv6	√	1	V	√
Wireless Intrusion Prevention System (WIPS)/Wireless Intrusion Detection System (WIDS)	J.	√	V	√)

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	NAC
	Network Admission Control (NAC) is an end-to-end access security framework and includes MAC address authentication"
	Huawei AR120&AR150&AR160&AR200&AR500&AR510&AR1 200&AR2200&AR3200&AR3600 Series Enterprise Routers Product Description, Issue 05 (2016-06-15) at 43.
	Routers may further operate as an Access Controller and provides MAC address authentication for WLAN:
	"3.2.6 WLAN
	A wireless local area network (WLAN) connects two or more computers or devices and enables the devices to communicate by using the wireless telecommunication technology. WLAN uses the wireless technology to implement fast Ethernet access. The primary advantage of WLAN is that terminals, such as computers, can access a network through a wireless medium rather than a physical cable. This facilitates network construction and allows users to move around without interrupting communication. WLAN is more flexible than traditional wired access.
	WLAN is widely used in public areas such as on campuses, business centers, and airports. The WLAN uses cables at the backbone layer, and users access the WLAN through one or more access points (APs) using radio waves. The transmission distance of an AP is tens of meters.
	IEEE 802.11 is widely used by WLANs. The device can function as an access controller (AC) or a Fat access point (FAT AP). The device as the AC or Fat AP supports 802.11a, 802.11b, 802.11g, 802.11an, and 802.11n.

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	NOTE
	Only AR121W, AR129W, AR121GW-L, AR129GW-L, AR151W-P, AR156W, AR157W, AR157VW, AR158EVW, AR161W, AR161FGW-L, AR169W, AR161FW-P-M5, AR161FGW-La, AR169FVW, AR169FGVW-L, AR169FGW-L, AR169W-P-M9, AR169RW-P-M9, AR201VW-P, AR207VW, AR510 series, AR503GW-LM7, AR503GW-LcM7, AR1220W, AR1220EVW and AR1220VW support WLAN-FAT AP.
	The device supports the following WLAN features:
	- WLAN user management
	- Dot1X access authentication
	 MAC address authentication
	- Pre-share-key (PSK) authentication
	 EAPOL-Key negotiation
	- User access control
	- AAA for WLAN users
	Huawei AR120&AR150&AR160&AR200&AR500&AR510&AR1 200&AR2200&AR3200&AR3600 Series Enterprise Routers Product Description, Issue 05 (2016-06-15) at 47.
	See also, e.g., Huawei Remote Unit Datasheets: R450D at 6 ("Security features - WIDS including rogue AP and STA detection, attack detection, STA/AP blacklist and whitelistIntrusion prevention"); R251D & R251D-E ("Wireless intrusion detection system (WIDS) and wireless intrusion prevention system (WIPS), including rogue device detection and countermeasure, attack detection and dynamic blacklist, and STA/AP blacklist and whitelist")

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	See also, e.g., Huawei Access Points (FATAP), V200R007C20, MIB Reference, Issue 05 (2019-03-15), available at https://support.huawei.com/enterprise/en/doc/EDOC1000154350, at Table 1 (listing products), 145-146, 1447-1515 and 2638-2712 (WIDS), 2790-2848 ("Station" / "STA" tables).
	Huawei consumer devices, including laptops, phones and tablets, are also designed to communicate with wireless networks via the IEEE 802.11 protocols. For example, specifications for Huawei smartphones such as the Huawei Mate SE indicate that they support "802.11b/g/n, 2.4 GHz" connectivity and the "Android N+EMUI 5.1" operating system. https://consumer.huawei.com/us/phones/mate-se/specs/. Specifications for Huawei's Mate 10 Pro smartphones indicate that they support "Wi-Fi 2.4G/5G, 802.11a/b/g/n/ac with Wi-Fi Direct support" connectivity and the "Android 8.0" and "EMUI 8.0" operating system. https://consumer.huawei.com/us/phones/mate10-pro/specs/. Specifications for Huawei laptops and tablets such as the Matebook 13 indicate that they support "IEEE 802.11a/b/g/n/ac" connectivity. https://consumer.huawei.com/en/laptops/matebook-13/specs/. Huawei consumer devices, including laptops, phones and tablets, also participate in the WIDS system as client
	stations (also referred to in WIDS and documentation as "STAs" or "ad hoc" devices). See, e.g., Huawei Technologies Co., Ltd., WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 7 ("When receiving a Probe Request, an Association Request, or a Reassociation Request frame, the AP determines whether the sender is an ad hoc device or STA based on the network type specified by the Capability subfield in the Frame Body field of the 802.11 MAC frame") see also id. at 11 ("Rogue STAs: After detecting a rogue STA, a monitor AP uses the BSSID and MAC address of the rogue STA to send a fake unicast Deauthentication frame to contain it. A STA whitelist can also be configured to prevent STAs in the STA whitelist from associating with rogue APs"). See also Huawei Access Points (FATAP), V200R007C20, MIB Reference, Issue 05 (2019-03-15), at 145-146 (MAC authentication table), 1447-1515 and 2638-2712 (WIDS), 2790-2848 ("Station" / "STA" tables). Accordingly, and as further detailed herein, these devices implement aspects of the WIDS system within the "wireless local or metropolitan area network" of the claim (also referred to as a Wireless LAN/MAN in the patent specification).

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	On information and belief Huawei consumer devices, including laptops, phones and tablets also can participate in the WIDS system as access points ("APs"), including when configured as a mobile hotspot.
	Huawei consumer devices, including laptops, phones and tablets implementing the security features of Huawei's EMUI operating system, including its "Wi-Fi threat detection" functionality, also implement intrusion detection according to the claim. <i>See, e.g.</i> , EMUI 8.0 Security Technical White Paper, available at https://consumerimg.huawei.com/content/dam/huawei-cbg-site/en/mkt/legal/privacy-policy/EMUI%208.0%20Security%20Technology%20White%20Paper.pdf, at 15 ("Wi-Fi connection can be authenticated using various methods, such as WEP, WPA/WPA2 PSK, 802.1x EAP, WPS, and WAP" and "EMUI provides Wi-Fi threat detection engine on access points. It detects the Wi-Fi to be connected. Once security risks are detected, it will notify users so that they can take measures to ensure connection security.").
	The Huawei eSight and eSight Network further incorporates the WIDS system:
	Wireless Network Security Detection
	The Wireless Intrusion Detection System (WIDS) monitors intrusion devices and non-Wi-Fi interferences and provides frequency spectrum analysis features.
	WIDS management: The WIDS manages wireless network interferences in different categories. Interferences are classified based on user customized rules. Upon detecting an interference, the WIDS chooses whether to generate an alarm based on user alarm configurations. The WIDS can also take countermeasures for unauthorized devices.
	Huawei eSight Full Product Datasheet, CH 12 eSight WLAN Manager; p. 53 (2013-09-03) Huawei Technologies Co., Ltd.; <i>see also</i> eSight V300R007C00 Product Description, Issue 09 (2018-02-08) at p. 58-59 (indicating that, on information and belief, all versions of eSight incorporate WIDS).

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	In another non-limiting example, Huawei installed a Wireless local or metropolitan area network at Waichai in Chicago, Illinois using S9700/S6700/S5700/WLAN products:
	The [Weichai North America] center located in suburban Chicago, which covers 20-acre parcel, and over 300 engineers will be working in this center.
	Huawei offered a comprehensive and tailor-made solution for Weichai, which provided end-to- end applications and services based on Huawei products [including] Two clustered S9706 LAN switches stacking with service interfaces at core layer combined with stacked gigabyte access S5700 POE LAN switches to create a loop-free network with high reliability.
	High density wireless users access capability and intelligent wireless network
	The Huawei AP6010 LAN access points provide integrated built-in MIMO antenna and spectrum analysis for even frequency coverage with no coverage hole, concurrent user access rate 20 percents higher than industry average. Moreover, wireless authentication and authorization can provide fine-grained access control for the security of WLAN network.
	Huawei was chosen as the only vendor by Weichai
	Huawei provided the necessary infrastructure of networks, Unified Communications and Collaboration (UC&C), IT solutions and simplified network management.

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	Huawei In Large Enterprise Case Studies at 12-13 (available at http://www.enterprisesolutions.altech.co.za/sites/ . Weichai Power Chicago Campus Background & Requirements * Weichai a representation and eastern manufacture; which specializes in the research, development, manufacturing, and sales of desee despites. In the releast of the releast of the selection of the releast of the selection of the releast of the selection of th
	Huawei further installed networks at Crowley Independent Schools in Texas: HUAWEI WLAN Successful Stories PowerPoint at 4; see also http://support.huawei.com/en/about/media_center/video_clips_list/hw-341648.htm

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	Crowley Independent School District in USA
	Background & Requirement Crowley Independent School District is a public school district based in Crowley, Texas. Serves the high/middle/elementary schools based in Crowley/Portions of Fort Worth and Edgecliff Village.
	Huawei Solution Huawei AP6010DN-AGN provide at most 600Mbps wireless connection for the students and teachers connect to CISD campus network. Huawei AC6605 can support at most 512 APs management per AC, provide a high expandable WLAN network for CISD schools. The Related Products: AC6605/AP6010DN
	Benefits Multiple terminal wireless access, compatible of different kinds of terminals, provide fast and reliable access through ISD WLAN network. Advance Wireless Structure: Distributed AP deploy and centralized management reduce the OPEX of the school's IT system. Enterprise huawel.com = Huawel Confidential * 4
	On information and belief, and as further discovery will show, Huawei has installed networks in other US locations, for example: Sears, one of the leading US retail enterprises, decided to use Huawei's technology and equipment when upgrading the networks of hundreds of stores. Northern Michigan University, Crowley Independent School District in Texas and Digital Domain, a visual effects and digital production company in Hollywood, have adopted storage, Internet solutions and other services provided by Huawei.

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	http://www.globaltimes.cn/content/864994.shtml
	On information and belief, all Huawei WLAN products, when combined to form a wireless local or metropolitan area network, are able to utilize the WIDS/WIPS technology. Huawei WLAN products are specifically designed to be linked together to form a wireless network, and to be used with other laptops, tablets, phones and WiFi capable devices, and Huawei directs and encourages such conduct. Accordingly, Huawei indirectly infringes this claim by inducing infringement.
	See e.g., WLAN Installation Service, available at http://support.huawei.com/enterprise/NewsReadAction.action?newType=05&contentId=NEWS1000006056 ; Enterprise NMS and Application Software Installation Service, available at http://support.huawei.com/enterprise/NewsReadAction.action?newType=05&contentId=NEWS1000006040 and other channel partner service descriptions at https://e.huawei.com/en/partner-program/services
	In yet a further example, Huawei has a 3, 4 and 5 Star and Global Certified Service Partner Certification program, in which, among other things, allows partners to receive Partner Enablement Support from Huawei. Service partners must meet certain requirements, for example:

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	Certification Requirement HCNA × 2 Domain: Enterprise Networking (R&S, WLAN, and Security), or Enterprise Networking (Transmission and Access), or Enterprise Cloud Communications (UC, CC, VC, and IVS), or IT (Storage, Server, Cloud Computing, and DC), or Network Energy (DCF and UPS)

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	Huawei offers its partners numerous trainings and certificates related to Enterprise Network, including courses that train individuals on designing and deploying WLAN networks, including aspects of WIDS/WIPS and network security.
	See, e.g., Training Description for Enterprise Network, available at <a apply-for-specialization="" e.huawei.com="" en="" href="https://e.huawei.com/en/marketing-material/partner-document/partner/en/channel%20partner%20program/legal%20-%20commercial/services/learning%20services/hw_201676; see also https://e.huawei.com/en/partner/partner-program/apply-for-specialization/network ; see also https://e.huawei.com/en/partner/partner-program/Overview/Enablement ("Huawei's Training System Huawei offers a broad variety of training courses such as HALP training, e-learning, and instructor-led courses to help channel partners improve their capabilities.")
	Huawei has at least 11 service partners that are part of its Enterprise Networking CSP Program, including:
	Eccom Network(USA) Inc FusionStorm China Telecom (Americas) Corporation Datalink Networks, Inc. Entisys360 Vlan24 Inc CANCOM US UNeed Solutions Inc. dba Noviant MJP Technologies Inc Unified Connexions, Inc. Stellar Services
	See https://e.huawei.com/en/partner/find-a-partner

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	Huawei encourages its partners to "promote Huawei's brand in the enterprise business market.": Huawei GD/RD/Distributor GP/RP/VAP Gold Silver Authorized Downstream Partners Huawei's Channel Policy Principles The principle of Huawei's channel policy is "to work and collaborate on a win-win basis." Work and collaborate: Maximize the value for our channel partners and customers by motivating channel partners to explore the market and promote Huawei's brand in the enterprise business market.

Case 2:18-cv-00439-JRG Document 92-12 Filed 08/27/19 Page 22 of 95 PageID #: 2626

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	Classification of Channel Partners
	Tier1 Partner: Distributor and Value Added Partner (VAP). Distributors include Global Distributors (GDs), Regional Distributors (RDs), and Local Distributors. Global Distributors and Regional Distributors are distributors that run business in multiple countries.
	Global Partners (GPs) and Regional Partners (RPs) work with Huawei in multiple countries and regions.
	Tier 2 Partner: Gold Partner, Silver Partner, and Authorized Partner
	For more information visit our Channel Partner Program page.
	https://e.huawei.com/en/partner/become-a-partner

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
CLAIM 12	Huawei Channel Structure Profice Profice
	At least two Huawei Distributors exist in the United States,

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	ASI Computer Technologies, Inc. in Fremont, CA; (selling Enterprise Cloud Communications, Data Center Switch, IT, Cloud Computing, Transport Network, Security, Access Network, Video Surveillance, Enterprise Networking Common, Campus Switch & WLAN, Enterprise Gateway, Router, UPS, Network Management)
	Wav, Inc. in Aurora Ill, (selling Data Center Switch, Enterprise Gateway, IT, Cloud Computing, Access Network, Network Management, Video Surveillance, Router, Enterprise Networking Common, Enterprise Cloud Communications, UPS, Campus Switch & WLAN, Transport Network, Security)
	https://e.huawei.com/en/partner/find-a-partner
	Value Added Partners must have a 2M sales performance threshold Channel Partner Program Briefing 2018, at p. 6, available at https://e.huawei.com/en/marketing-material/partner-document/partner/en/policy/20170428113204
	Value Added Partners:
	- Act as major partners of Huawei's Enterprise BG in regional markets.
	- Promise to attain business targets for related industries and customers of Huawei's Enterprise BG.
	 Develop industry customer relationship platforms and provide support for Huawei's products to industry users.
	https://e.huawei.com/en/partner-program/policy
	Value Added Partners in the United States that offer Enterprise Network products include:

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	Proyectos Integrales Solares SL dba Proinso US LLC FusionStorm Consolidated Electrical Distri Rahi Systems, Inc Onesource Distributors, LLC Sonepar Management Us, Inc. CANCOM US WORLD WIDE TECHNOLOGY, LLC Wesco Distribution, Inc. Entisys360 China Telecom (Americas) Corporation See https://e.huawei.com/en/partner/find-a-partner Gold Partners in the United States that offer Enterprise Network products include Cloud Trekkers Technologies Inc Silver Partners in the United States that offer Enterprise Network products include Twotrees Technologies, LLC Mark III Systems, Inc UNeed Solutions Inc. dba Noviant Gold and Silver Partners have sales performance thresholds of 0.5M and 0.25M (Channel Partner Program Briefing 2018, at p. 6, available at https://e.huawei.com/en/marketing-material/partner-document/partner/en/policy/20170428113204

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	Gold and Silver Partners
	- Act as major partners of Huawei's Enterprise BG in regional markets.
	- Promise to accomplish business targets for related industries and customers of Huawei's Enterprise BG.
	 Develop industry customer relationship platforms and provide support for Huawei's products to industry users.
	https://e.huawei.com/en/partner-program/policy
	Huawei also has more than 50 Authorized Partners that offer Enterprise Network products See https://e.huawei.com/en/partner/find-a-partner
	Huawei further actively encourages infringement and sales of Huawei networks by imposing penalties for violations:
	"Level-2 violation" of the partnership agreement to "direct unauthorized sales"
	"Level-3 violation" for "indirect unauthorized sales" and if a "Channel does not fulfill service contract or order" or "Provides services to customers through non-Huawei certified maintenance companies"
	Channel Partner Program Briefing 2018 at p.9, available at https://e.huawei.com/en/marketing-material/partner-document/partner/en/policy/20170428113204

'678 PATENT CLAIM 12	Infringement By Huawei Corporation							
[a] a plurality of stations for transmitting data therebetween using a media access layer (MAC), each of said stations having a respective MAC address associated therewith; and	Huawei '678 Patent Accused Products form a network comprising a plurality of stations (including, without limitation, Stations, STAs, Access Points, APs, and/or Remote Units) for transmitting data therebetween using a media access layer (MAC), each of said stations having a respective MAC address associated therewith. One exemplary network configuration is shown: WLAN Infrastructure Figure 1-1 WLAN Networking RADIUS Server MAN Data flow Management Access Server Data flow Management Number Chain networking Chain networking Chain networking Branched networking Branched networking Branched networking							
	(tunnel forwarding) (direct forwarding) (direct forwarding)							

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	As shown in Figure 1-1, a WLAN consists of access points (APs), PoE switches, access controllers (ACs), Remote Authentication Dial In User Service (RADIUS) server, and network management system (NMS).
	 AP: WLAN access device. Huawei provides a series of fit APs to meet indoor and outdoor networking requirements.
	 PoE switch: upstream devices for APs. It provides data switching and power for APs. If only one AC is required and the AC has PoE ports, the PoE switch is not required.
	- AC: manages APs and controls the rights of WLAN users.
	- RADIUS server: authenticates WLAN users and assigns rights to them. The RADIUS server is installed on the SPES server.
	- NMS: manages APs and ACs. It monitors status of ACs and APs in real time, processes alarms, and analyzes data.
	HUAWEI WLAN Typical Configuration Examples, Issue 01 (2017-12-29) at 2. https://support.huawei.com/enterprise/en/doc/EDOC1000184389/1d542042/introduction-to-wlan
	In another configuration example, a WDS (Wireless Distribution System) may wirelessly connect two WLANs:

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	Figure 1-1 WDS network AP3 AP2 AP1 (root) AC STA Switch STA Swi

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	Figure 4-7 Networking for configuring rogue device detection and containment Management VLAN: VLAN100 Service VLAN: VLAN101 VLANIF101 10.23.101.2/24 (area_1) SSID: walan-net GE0/0/1 STA ((** Rougue AP (area_2) SSID: wlan-net Network Rougue AP (area_2) SSID: wlan-net HUAWEI WLAN Typical Configuration Examples, Issue 01 (2017-12-29) at 123.

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	On WLANs, APs, STAs, ad hoc devices, and wireless bridges need to be monitored. When an AP working in normal mode with air interface scan functions enabled on radios or in monitor mode, it can identify the types of neighboring wireless devices based on detected 802.11 management and data frames. The wireless device identification process is as follows:
	1. On the AC, the AP is configured to work in monitor mode or in normal mode with air interface scan functions enabled on radios.
	2. The AC delivers the configuration to the AP.
	3. The AP scans channels to collect information about neighboring wireless devices, and listens on frames sent by neighboring wireless devices to identify device types. The AP listens on the following types of frames:
	 Beacon Association Request Association Response Reassociation Request Reassociation Response Probe Response Data frame 4. The AP reports the identified device types to the AC. The AC then determines whether the identified devices are authorized and notifies the AP of rogue devices.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 4.

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	Figure 2-3 Rogue device detection and identification AP AP AP AP AP AP AP AP AP A
	The AP identifies the types of neighboring wireless devices based on detected 802.11 management and data frames. The Frame Control field in the MAC header of a frame indicates the frame type. Figure 2-4 shows the subfields of the Frame Control field.

'678 PATENT CLAIM 12		Infringement By Huawei Corporation													
	Fig	Figure 2-4 MAC header of an 802.11 frame MAC Header													
		2 bytes	2 bytes	6 bytes		ytes	6 bytes		2 bytes	6 bytes	2 bytes	0 - 2312	oytes 4 bytes		
		Frame Control	Duration /ID	The second second	s Ad	tress 2			Sequence Control	Address 4	QoS Control	Frame Body	Ece		
		2 bits	2 bits 2 bits		1 bit	bit 1 bit	1 bit 1		1 bit 1 bi	t 1 bit	1 bit	1 bit	bit		
		Protocol Version	Type S	Subtype	To F	rom	More Frag	Re	etry Pwi		100.00000000000000000000000000000000000	CH	der		
	at 5.														
	Each station has	Each station has a MAC address associated therewith													
	A	ttribute				L	Description								
	M	IAC addı	ress			N	IAC a	ddı	ress of th	ne devic	e				
	Huawei Technoat 9.	ologies C	o., Ltd.	WLAN	WIL)S &	WIPS	' Te	echnolog	y White	Paper;	Issue 2	.0 (2017-07-05)		

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	MAC address - A link layer address or physical address. It is six bytes long.
	Huawei consumer devices, including laptops, phones and tablets, also participate in the WIDS system as client stations (also referred to in WIDS and documentation as "STAs" or "ad hoc" devices). See, e.g., Huawei Technologies Co., Ltd., WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 7 ("When receiving a Probe Request, an Association Request, or a Reassociation Request frame, the AP determines whether the sender is an ad hoc device or STA based on the network type specified by the Capability subfield in the Frame Body field of the 802.11 MAC frame") see also id. at 11 ("Rogue STAs: After detecting a rogue STA, a monitor AP uses the BSSID and MAC address of the rogue STA to send a fake unicast Deauthentication frame to contain it. A STA whitelist can also be configured to prevent STAs in the STA whitelist from associating with rogue APs").
[b] a policing station for detecting intrusions into the wireless network by	Huawei '678 Patent Accused Products comprise a policing station for detecting intrusions into the wireless network. For example, Huawei WLAN products utilize the WIDS technology to detect intrusions
	802.11 networks are open wireless public networks, and vulnerable to various threats caused by unauthorized APs and STAs, ad hoc networks, bogus APs, and denial of service (DoS) attacks of malicious STAs. The Wireless Intrusion Detection System (WIDS) and Wireless Intrusion Prevention System (WIPS) functions monitor and prevent the preceding attacks on WLANs.
	This document describes WIDS and WIPS technologies used by Huawei WLAN products. Enterprises can use the WIDS and WIPS functions to secure their wireless networks, reduce


'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	interference from unauthorized devices, protect STAs from malicious attacks, and deliver better user experience.
	The WIDS detects rogue STAs, malicious user attacks, and wireless network intrusions.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 1-2.
	The WIDS and WIPS functions of Huawei WLAN products ensure security of customers' wireless networks, reduce interference from rogue devices, and protect STAs from malicious attacks, delivering better user experience.
	Selection of different protection measures based on their network scale
	The WIDS and WIPS functions provide different protection measures based on the scale of customer networks.
	- For home networks or small enterprise networks, protection measures are provided to control access of APs and STAs using blacklists and whitelists.
	- For small- and medium-scale enterprise networks, WIDS attack detection and defense are provided.
	- For medium- and large-scale enterprise networks, rogue device detection, identification, defense, and containment are provided.
	Customers can also perform other protection configurations.

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	Rogue device identification and defense
	The WIDS and WIPS functions can identify rogue devices on the WLAN and take preventive measures to protect customer networks against intrusions or interference of rogue devices.
	Customer network protection against attacks
	The WIDS and WIPS functions can detect multiple types of attacks such as flood attacks, weak IV attacks, spoofing attacks, brute force WPA/WPA2/WAPI PSK cracking, and WEP shared key cracking. The functions protect customer networks from being attacked by rogue devices.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 20.
	For example, a monitor AP may act as a policing station for detecting intrusions (e.g., rogue devices) into the wireless network:


'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	Figure 2-1 Overview of WLAN security technologies STA AP AC AAA Server Access authentication Policy control WIDS & WIPS WIDS & WIPS

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	In the preceding figure, the WIDS and WIPS are used to detect and contain rogue devices respectively. The WIDS can detect rogue APs, rogue wireless bridges, rogue STAs, ad hoc devices, and interference APs with duplicate channels. The WIPS can disassociate authorized STAs from rogue APs, and disconnect rogue STAs and ad hoc devices from the WLAN to contain rogue devices. NOTE APs in this document are Fit APs. Fat APs and cloud APs also provide the WIDS and WIPS functions. Different from Fat APs that provide the WIDS and WIPS functions themselves, Fit APs need to work with ACs to provide the functions.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 3.
	2.2 Rogue Device Detection
	Rogue device detection of WLANs is enabled to monitor the entire network. Monitor APs are deployed on a WLAN that needs protection to monitor the entire network. The monitor APs can periodically listen on wireless signals to detect rogue devices.
	2.2.1 Working Modes of APs
	Before enabling rogue device detection on a WLAN, configure APs' working modes.
	An AP works in normal or monitor mode.
	 Normal mode: If the WIDS and WIPS functions and other air interface scan functions are disabled on a radio, such as spectrum analysis and STA location, this radio can be used only to transmit common WLAN service data. If the WIDS and WIPS functions

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	are enabled, the working mode of the radio is automatically switched to hybrid. In addition to transmitting common WLAN service data, the radio can also provide the monitoring function. In this case, transmission of common WLAN service data is affected.
	 Monitor mode: A monitor AP scans devices on the WLAN and listens on all 802.11 frames on wireless channels. In this case, the monitor AP provides only the monitoring function and cannot transmit WLAN service data. The following figure shows the principles of the two working modes.
	Normal mode The WISD and WIPS functions and other air interface scan functions are disabled. Channel
	The WISD and WIPS functions are enabled.
	Channel Ch1 Channel Ch2 Channel ChN
	Monitor mode Monitor mode
	Channel Ch1 Channel Ch2 Channel Ch3 ChN Channel Ch1 Channel
	Long monitoring period: N Monitoring period for each channel (N indicates the number of monitored channels.)
	Figure 2-2 Principles of the two working modes

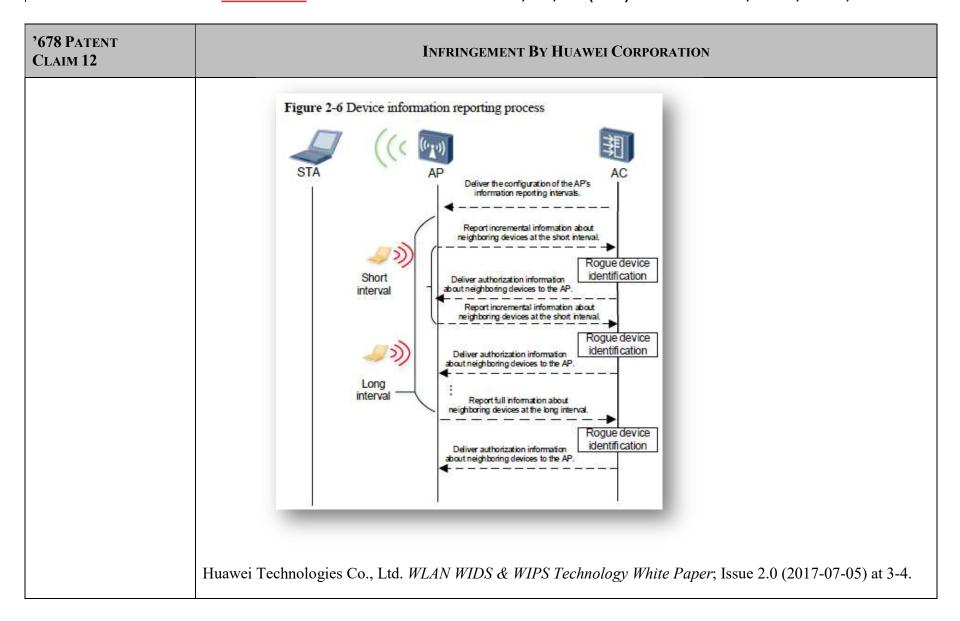

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	The device information reporting process is described as follows:
	• On the AC, a short interval is configured for the AP to report information about neighboring wireless devices. (The long interval is provided by the system by default.)
	• The AC delivers the configuration to the AP.
	• The AP listens on frames to collect information about neighboring wireless devices, and reports the information to the AC at the specified short interval. The AC then determines whether the wireless devices are rogue devices and delivers the identification result to the AP. When the wireless devices are scanned again by the AP, the AP automatically checks whether they are rogue devices based on the identification result sent by the AC.
	 The AP reports full information about all detected wireless devices to the AC at the long interval for information synchronization. The AC then determines whether the wireless devices are rogue devices and delivers the identification result to the AP. When the wireless devices are scanned again by the AP, the AP automatically checks whether they are rogue devices based on the identification result sent by the AC.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 8.

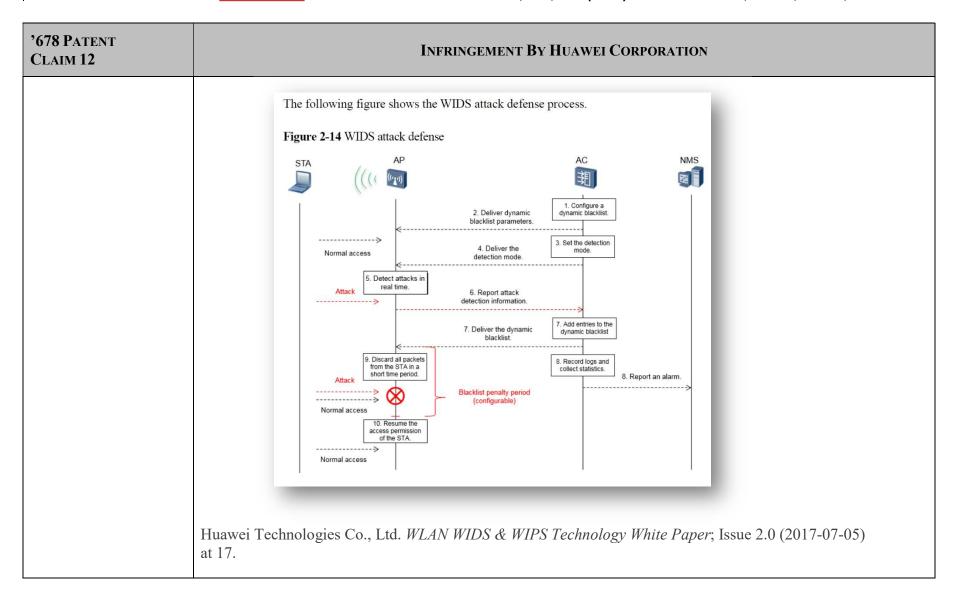

42

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	The Huawei eSight Platform, including at least the WLAN Manager and LogCenter Manager, is further used as a network management system that also detects intrusions into the wireless network:
	The Huawei eSight Platform further incorporates the WIDS system:
	Wireless Network Security Detection
	The Wireless Intrusion Detection System (WIDS) monitors intrusion devices and non-Wi-Fi interferences and provides frequency spectrum analysis features.
	WIDS management: The WIDS manages wireless network interferences in different categories. Interferences are classified based on user customized rules. Upon detecting an interference, the WIDS chooses whether to generate an alarm based on user alarm configurations. The WIDS can also take countermeasures for unauthorized devices.
	Huawei eSight Full Product Datasheet, CH 12 eSight WLAN Manager; p. 53 (2013-09-03) Huawei Technologies Co., Ltd.; <i>see also</i> eSight V300R007C00 Product Description, Issue 09 (2018-02-08) at p. 58-59 (indicating that, on information and belief, all versions of eSight incorporate WIDS).


'678 PATENT CLAIM 12	INFRINGEMENT BY HUAWEI CORPORATION
	Rich Security Event Analysis Reports Showing Network Security Status eSight LogCenter collects security event logs about network security devices and systems, such as Huawei network UTM system, firewalls, intrusion protection system, and Anti-DDoS system, analyzes them, and generates reports to help users learn the network security status. eSight LogCenter supports DDoS attack event analysis, plug-in block analysis, access control event analysis, policy matching analysis, IPS analysis, URL filter analysis, and email filter analysis.
	Huawei eSight Full Product Datasheet, CH 11 eSight LogCenter Manager; p. 44 (2013-09-03) Huawei Technologies Co., Ltd. Security
	Users can monitor rogue devices, clients, interference sources, and attacks on the network, define rules to identify intrusion devices, generate remote alarm notifications, and take measures to prevent intrusions.
	1. Supports statistics and display of and countermeasure against rogue devices.
	 Supports the display of and countermeasure against rogue clients and suppression access protection.
	3. Supports statistics and display of non-Wi-Fi interference sources.
	4. Supports statistics and display of attacks and protection against attacks.
	5. Allows users to define rules and classify rogue APs (rogue, suspected-rogue, adjacent, suspected-adjacent, and interference). Supported rule matching indicators include

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	adjacent- or same-frequency interference, signal strength, SSID (fuzzy match/regular expression), the number of detected APs, and whether to attack.
	eSight V300R007C00 Product Description, Issue 09 (2018-02-08) at p. 63.
	On information and belief Huawei consumer devices, including laptops, phones and tablets also can participate in the WIDS system as access points ("APs"), including when configured as a mobile hotspot.
	Huawei consumer devices, including laptops, phones and tablets implementing the security features of Huawei's EMUI operating system, including its "Wi-Fi threat detection" functionality, also implement intrusion detection according to the claim. See, e.g., EMUI 8.0 Security Technical White Paper, available at https://consumerimg.huawei.com/content/dam/huawei-cbg-site/en/mkt/legal/privacy-policy/EMUI%208.0%20Security%20Technology%20White%20Paper.pdf, at 15 ("Wi-Fi connection can be authenticated using various methods, such as WEP, WPA/WPA2 PSK, 802.1x EAP, WPS, and WAP" and "EMUI provides Wi-Fi threat detection engine on access points. It detects the Wi-Fi to be connected. Once security risks are detected, it will notify users so that they can take measures to ensure connection security.").
[c] monitoring transmissions among said plurality of stations to detect failed attempts to authenticate MAC addresses; and	The '678 Patent Accused Products comprise policing stations, as described above in [b], that are capable of monitoring transmissions among said plurality of stations to detect failed attempts to authenticate MAC addresses. For example, the policing station is capable of detecting when an intruder attempts to authenticate a MAC address using Brute Force Cracking in which there are failed attempts to authenticate.
	2.4 WIDS Attack Detection

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	To protect a WLAN against attacks, you can configure real-time attack detection on APs. When detecting abnormal behavior or packets, the system considers that it is attacked and performs automatic security protection.
	Figure 2-9 WIDS attack detection scenario IP network AP AP AP AR AR AR AR AR AR AR
	On the WLAN shown in the preceding figure, WIDS attack detection can be enabled on the AC when the WLAN access service is provided. The WIDS can detect 802.11 flood attacks, spoofing attacks, and weak initialization vector (IV) attacks, and can also defend the WLAN against brute force cracking.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 12. 2.4.4 Defense Against Brute Force Cracking
	A brute force attack, or exhaustive key search, is a cryptanalytic attack that tries every possible password combination to find the real password. For example, a password that contains only


Case 2:18-cv-00439-JRG Document 92-12 Filed 08/27/19 Page 47 of 95 PageID #: 2651

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	four digits may have a maximum of 10,000 combinations. The password can be cracked after a maximum of 10,000 attempts. Theoretically, an attacker can use the brute force method to crack any password. The cracking duration varies depending on the security mechanism and password length. Therefore, brute force cracking threats exist when any authentication mode is used.
	 When a WLAN uses the WPA/WPA2-PSK, WAPI-PSK, or WEP-Shared-Key security policy (link authentication), attackers may use the brute force method to crack passwords.
	 When a user authentication mode is used, such as MAC address, Portal, or 802.1X authentication, brute force cracking threats also exist.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 15.

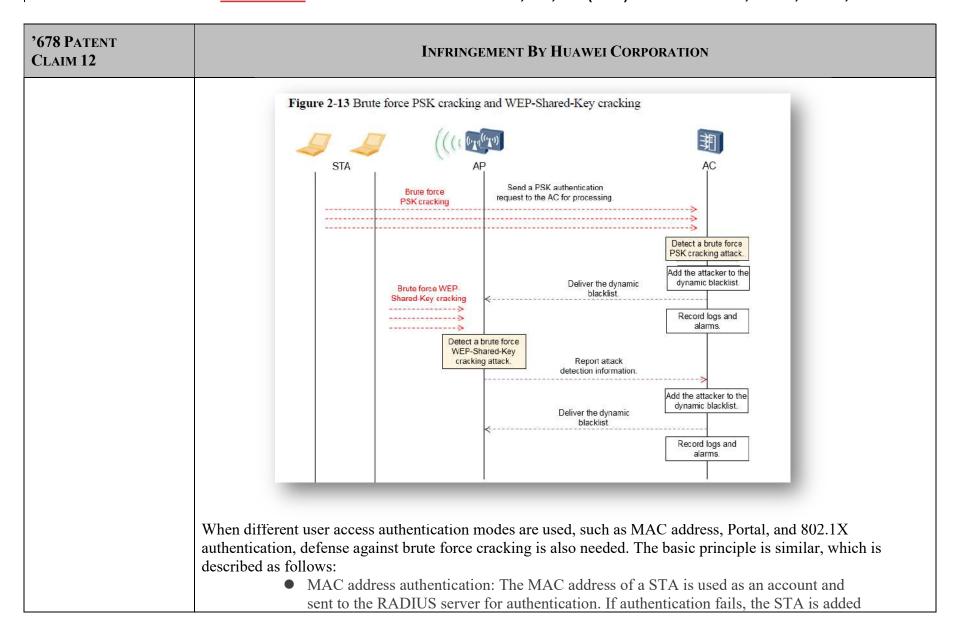

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	to the STA blacklist and prohibited from accessing the network within a short time period (configurable and 60s by default).
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 16.
	The Huawei eSight Platform further incorporates the WIDS system and monitors transmissions among the stations as indicated above.
	Wireless Network Security Detection
	The Wireless Intrusion Detection System (WIDS) monitors intrusion devices and non-Wi-Fi interferences and provides frequency spectrum analysis features.
	WIDS management: The WIDS manages wireless network interferences in different categories. Interferences are classified based on user customized rules. Upon detecting an interference, the WIDS chooses whether to generate an alarm based on user alarm configurations. The WIDS can also take countermeasures for unauthorized devices.
	Huawei eSight Full Product Datasheet, CH 12 eSight WLAN Manager; p. 53 (2013-09-03) Huawei Technologies Co., Ltd.; <i>see also</i> eSight V300R007C00 Product Description, Issue 09 (2018-02-08) at p. 58-59 (indicating that, on information and belief, all versions of eSight incorporate WIDS).
	WIDS Wireless Intrusion Detection System
	The Wireless Intrusion Detection System (WIDS) manages information about rogue devices, interference resources, and attacks, and supports type-based recognition and alarm notification based on user-defined rules. Besides, the WIDS allows users to take countermeasures against unauthorized devices, ensuring wireless network security.


'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	Network administrators can classify and filter rogue APs and management alarms based on defined rules. Rule definition involves the following indicators: SSID, channel, field strength, impact scope, and attack behavior. Users can enable eSight to generate alarms when rogue APs in compliance with defined rules are detected. Same or adjacent channel This rule is used to detect the channel deployment of APs, and detect rogue APs that operate in the same or adjacent channel. If rogue APs operate in the same channel with normal APs, eSight regards it as same-frequency interference; if rogue APs operate in an adjacent channel, eSight regards it as adjacent-frequency interference

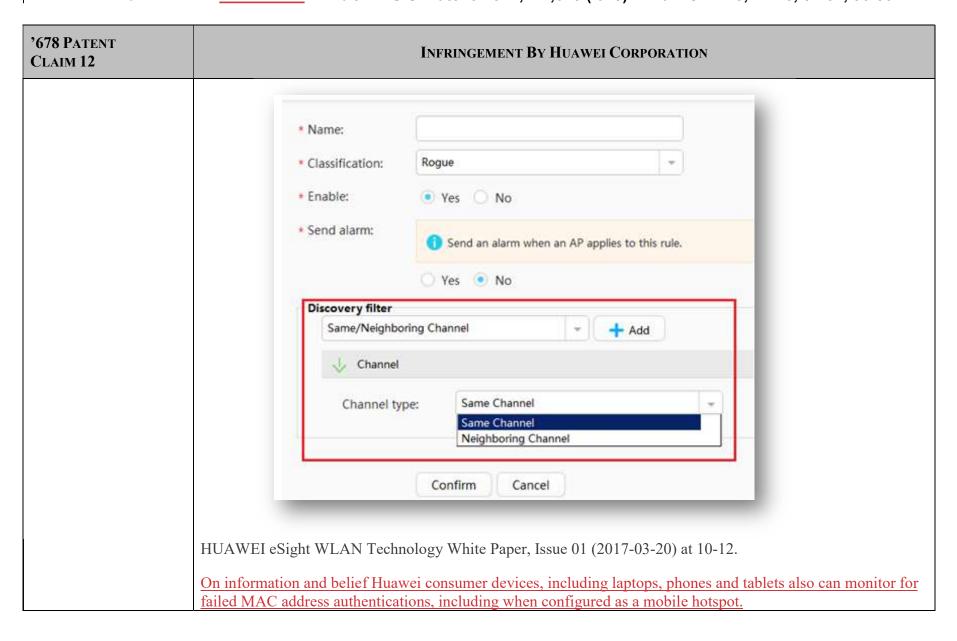

Case 2:18-cv-00439-JRG Document 92-12 Filed 08/27/19 Page 52 of 95 PageID #: 2656


'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	Huawei consumer devices, including laptops, phones and tablets implementing the security features of Huawei's EMUI operating system, including its "Wi-Fi threat detection" functionality, also monitor for failed MAC address authentications. See, e.g., EMUI 8.0 Security Technical White Paper, available at https://consumerimg.huawei.com/content/dam/huawei-cbg-site/en/mkt/legal/privacy-policy/EMUI%208.0%20Security%20Technology%20White%20Paper.pdf, at 15 ("Wi-Fi connection can be authenticated using various methods, such as WEP, WPA/WPA2 PSK, 802.1x EAP, WPS, and WAP" and "EMUI provides Wi-Fi threat detection engine on access points. It detects the Wi-Fi to be connected. Once security risks are detected, it will notify users so that they can take measures to ensure connection security.").
[d] generating an intrusion alert based upon detecting a number of failed attempts to authenticate a MAC address.	As described above, on information and belief, the policing stations are capable of generating an intrusion alert based upon detecting a number of failed attempts to authenticate a MAC address. For example, if the AP considers that the STA is using the brute force cracking, it generates and sends an alarm to the AC, and on information and belief, such alarm is generated in the event of a MAC address brute force cracking attempt: An AP checks whether the number of key negotiation attempts within a specified time period during WPA/WPA2-PSK, WAPI-PSK, or WEP-Shared-Key authentication exceeds the specified threshold (configurable). If so, the AP considers that the STA is using the brute force method to crack the password and reports an alarm to the AC.
	When different user access authentication modes are used, such as MAC address, Portal, and 802.1X authentication, defense against brute force cracking is also needed. The basic principle is similar, which is described as follows:
	 MAC address authentication: The MAC address of a STA is used as an account and sent to the RADIUS server for authentication. If authentication fails, the STA is added to the STA

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	blacklist and prohibited from accessing the network within a short time period (configurable and 60s by default).
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 15-16.
	Defense against PSK cracking: Security authentication modes for wireless users include WEP shared key, WPA/WPA2 PSK, WPA/WPA2 dot1x, WAPI certificate, and WAPI PSK. Theoretically, if a client keeps exhaustive key search, it can crack the key. Therefore, a protection mechanism is added so that when the number of authentication attempts exceeds a specified threshold, packets from the client are discarded in a specified time to prevent the user from continuous brute force attacks, reducing the adverse effects of frequent negotiations on devices and the network.
	WLAN WIDS Technology White Paper, Issue 1.0 (2014-04-24) at 12.

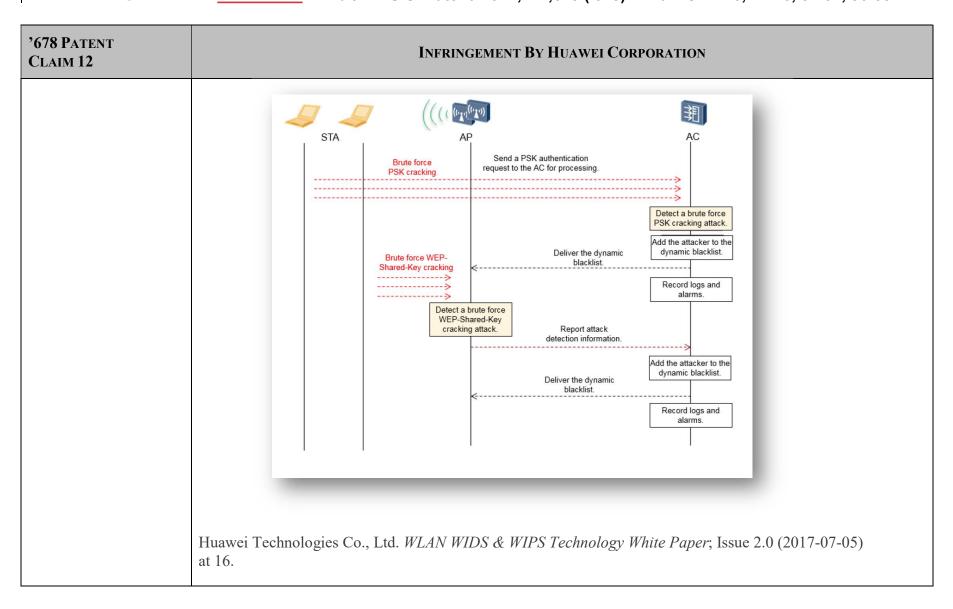

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	As described in Huawei Support documentation, a number of failed attempts to authenticate the MAC address results in locking the user account, which, on information and belief, triggers the generation of an alarm as described above:
	By default, the account locking function is enabled on the AC to ensure security of user passwords. If a user fails authentication over 30 times within 30 minutes, the AC locks the user account for a specified period of time, during which this account cannot be authenticated.
	Some terminals initiate MAC address authentication but do not initiate Portal authentication several times after associating with SSIDs. (For example, background applications on a mobile phone initiate multiple TCP requests instantly after the mobile phone associates with an SSID.) If the MAC address of a terminal is not recorded in the AAA server, and the terminal fails authentication over 30 times within 30 minutes, the AC locks the user account (the terminal's MAC address). Therefore, the terminal fails MAC address authentication and the Portal authentication page is displayed.
	Huawei Community Forums, [From Beginner to Expert - WLAN Fundamentals] Section 11 - WLAN Access Authentic. Jun 25, 2016 (at https://forum.huawei.com/enterprise/en/From-Beginner-to-Expert-WLAN-Fundamentals-Section-11-WLAN-Access-Authentic/thread/346361-869)
	Further, eSight generates an intrusion alert based upon detecting a number of failed attempts to authenticate a MAC address, including by utilizing WIDS as described above; further, rogue devices may trigger alarms. For example:
	Security
	Users can monitor rogue devices, clients, interference sources, and attacks on the network, define rules to identify intrusion devices, generate remote alarm notifications, and take measures to prevent intrusions.

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	1. Supports statistics and display of and countermeasure against rogue devices.
	2. Supports the display of and countermeasure against rogue clients and suppression access protection.
	3. Supports statistics and display of non-Wi-Fi interference sources.
	4. Supports statistics and display of attacks and protection against attacks.
	5. Allows users to define rules and classify rogue APs (rogue, suspected-rogue, adjacent, suspected-adjacent, and interference). Supported rule matching indicators include adjacent- or same-frequency interference, signal strength, SSID (fuzzy match/regular expression), the number of detected APs, and whether to attack.
	eSight V300R007C00 Product Description, Issue 09 (2018-02-08) at p. 63; see also id. at 74 (3. eSight supports alarms about communications, environments, rogue devices, non-Wi-Fi interference sources, and attacks to help users locate and resolve faults.).

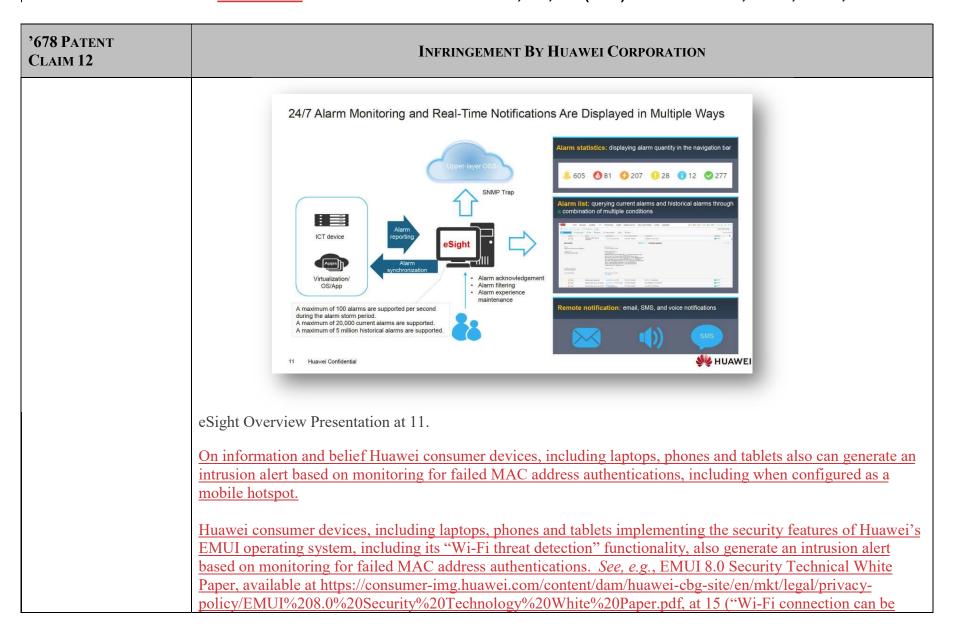

'678 PATENT CLAIM 12	Infringement By Huawei Corporation
	authenticated using various methods, such as WEP, WPA/WPA2 PSK, 802.1x EAP, WPS, and WAP" and "EMUI provides Wi-Fi threat detection engine on access points. It detects the Wi-Fi to be connected. Once security risks are detected, it will notify users so that they can take measures to ensure connection security.").

'678 PATENT CLAIM 13	Infringement By Huawei Corporation
13. The wireless network of claim 12 wherein said policing station generates an intrusion alert based upon detecting the number of failed attempts to authenticate the MAC address within a predetermined period.	The Huawei '678 Accused Products infringe this claim. See Claim 12. Such Instrumentalities further have a policing station capable of generating an intrusion alert based upon detecting the number of failed attempts to authenticate the MAC address within a predetermined period. For example, as described in the WIDS Technology White Paper, on information and belief, an alarm is generated from the AP after a threshold number of authentication attempts: An AP checks whether the number of key negotiation attempts within a specified time period during [] authentication exceeds the specified threshold (configurable). If so, the AP considers that the STA is using the brute force method to crack the password and reports an alarm to the AC. When different user access authentication modes are used, such as MAC address, Portal, and 802.1X authentication, defense against brute force cracking is also needed. The basic principle is similar, which is described as follows: • MAC address authentication: The MAC address of a STA is used as an account and sent to the RADIUS server for authentication. If authentication fails, the STA

'678 PATENT CLAIM 13	Infringement By Huawei Corporation
	is added to the STA blacklist and prohibited from accessing the network within a short time period (configurable and 60s by default).
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 15-16.
	Further, a detection period and detection threshold may be set that, on information and belief, would include the failed attempts to authenticate the MAC address:

'678 PATENT CLAIM 13	Infringement By Huawei Corporation
	INFRINGEMENT BY HUAWEI CORPORATION AC 1. Configure 3 2. Deliver dynamic blacklist blacklist parameters. 4. Deliver the dynamic blacklist 7. Deliver the dynamic blacklist blacklist. 7. Deliver the dynamic blacklist blacklist. 8. Report an alarm. Blacklist penalty period (configurable) 1. The dynamic blacklist function is configured on the AC and the blacklist entry aging time is specified.
	2. The AC sends the dynamic blacklist enabled flag and blacklist entry aging time to the AP.

'678 PATENT CLAIM 13	Infringement By Huawei Corporation
	3. The WIDS attack detection mode is configured on the AC. The detection period and detection threshold (number of packets detected within the specified time period to identify an attack) are set.
	4. The AC delivers the detection mode, detection period, and detection threshold to the AP.
	5. The AP detects attacks in attack detection mode delivered by the AC.
	6. When the AP detects an attack, it reports attack information to the AC, such as the MAC address of the attacking device and the attack type. After receiving the attack information, the AC adds the attacking device to the attacking device list. If the AP detects no attack from this attacking device in the next three attack detection periods, it requests the AC to delete the attacking device from the list.
	7. The AC determines whether to add the attacking device to the dynamic blacklist. It records detected brute force PSK crackers to the dynamic blacklist cache table, and delivers the table to the AP.
	8. The AC collects statistics on attack types and sends trap messages to report the attack types to the NMS.
	9. After receiving the dynamic blacklist, the AP discards the packets from the attacking devices in the dynamic blacklist.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 17.
	As described in Huawei Support documentation, for example, the AC may also detect the number of failed attempts to authenticate the MAC address (e.g., over 30 times) within a predetermined period (e.g.,


'678 PATENT CLAIM 13	Infringement By Huawei Corporation
	within 30 minutes) which, on information and belief, triggers the generation of an alarm or intrusion alert as described above:
	By default, the account locking function is enabled on the AC to ensure security of user passwords. If a user fails authentication over 30 times within 30 minutes, the AC locks the user account for a specified period of time, during which this account cannot be authenticated.
	Some terminals initiate MAC address authentication but do not initiate Portal authentication several times after associating with SSIDs. (For example, background applications on a mobile phone initiate multiple TCP requests instantly after the mobile phone associates with an SSID.) If the MAC address of a terminal is not recorded in the AAA server, and the terminal fails authentication over 30 times within 30 minutes, the AC locks the user account (the terminal's MAC address). Therefore, the terminal fails MAC address authentication and the Portal authentication page is displayed.
	Huawei Community Forums, [From Beginner to Expert - WLAN Fundamentals] Section 11 - WLAN Access Authentic. Jun 25, 2016 (at https://forum.huawei.com/enterprise/en/From-Beginner-to-Expert-WLAN-Fundamentals-Section-11-WLAN-Access-Authentic/thread/346361-869)
	eSight is also involved in the generation of intrusion alerts, for example:
	Security
	Users can monitor rogue devices, clients, interference sources, and attacks on the network, define rules to identify intrusion devices, generate remote alarm notifications, and take measures to prevent intrusions.
	1. Supports statistics and display of and countermeasure against rogue devices.


'678 PATENT CLAIM 13	Infringement By Huawei Corporation
	2. Supports the display of and countermeasure against rogue clients and suppression access protection.
	3. Supports statistics and display of non-Wi-Fi interference sources.
	4. Supports statistics and display of attacks and protection against attacks.
	5. Allows users to define rules and classify rogue APs (rogue, suspected-rogue, adjacent, suspected-adjacent, and interference). Supported rule matching indicators include adjacent- or same-frequency interference, signal strength, SSID (fuzzy match/regular expression), the number of detected APs, and whether to attack. eSight V300R007C00 Product Description, Issue 09 (2018-02-08) at p. 63; see also id. at 74 (3. eSight supports alarms about communications, environments, rogue devices, non-Wi-Fi interference sources, and attacks to help users locate and resolve faults.). See also claim element 12(d) above.
'678 PATENT CLAIM 17	Infringement By Huawei Corporation
17. The wireless network of claim 12 wherein the wireless network has at least one	The Huawei '678 Accused Products infringe this claim. <i>See</i> Claim 12. Further, the wireless network has at least one service set identification (ID) associated therewith.
service set identification (ID) associated therewith; and wherein said policing station	Most wireless networks have an SSID associated therewith. As a non-limiting example, as described in the WIDS and WIPS whitepaper, a company WLAN may have an associated SSID:

'678 PATENT CLAIM 17	Infringement By Huawei Corporation
further detects intrusions into the wireless network by:	In this case, company B can add the SSID of company A's WLAN to the SSID whitelist so that APs in company A will not be detected as rogue devices
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 22.
	3.1.9 SSID Profile
	SSIDs identify different wireless networks. When you search for available wireless networks on your laptop, the displayed wireless network names are SSIDs.
	An SSID profile is used to configure the SSID name and other access parameters of a WLAN.
	HUAWEI WLAN Typical Configuration Examples, Issue 01 (2017-12-29) at 24.

'678 PATENT CLAIM 17	Infringement By Huawei Corporation
	Rogue AP 2 uses the same SSID as the WLAN system of the company

'678 PATENT CLAIM 17	Infringement By Huawei Corporation
	Huawei Technologies Co., Ltd. <i>WLAN WIDS & WIPS Technology White Paper</i> ; Issue 2.0 (2017-07-05) at 22-23 (emphasis added).
	As further described in the eSight documentation, eSight using WIDS also detects intrusions in the wireless network in accordance with the claim as described below
	WIDS Wireless Intrusion Detection System
	The Wireless Intrusion Detection System (WIDS) manages information about rogue devices, interference resources, and attacks, and supports type-based recognition and alarm notification based on user-defined rules. Besides, the WIDS allows users to take countermeasures against unauthorized devices, ensuring wireless network security.
	Network administrators can classify and filter rogue APs and management alarms based on defined rules. Rule definition involves the following indicators: SSID, channel, field strength, impact scope, and attack behavior. Users can enable eSight to generate alarms when rogue APs in compliance with defined rules are detected.
	SSID
	The service set identifiers of networks from unauthorized vendors or wireless networks established by individuals are similar to authorized SSIDs. For example, the SSIDs are the same or characters are similar (such as 0 and 0). In this case, users may be deceived to log in to rogue wireless networks. An SSID rule can be used to detect rogue APs whose SSIDs are similar to the authorized SSIDs or when a specified rule (regular expression) is met.

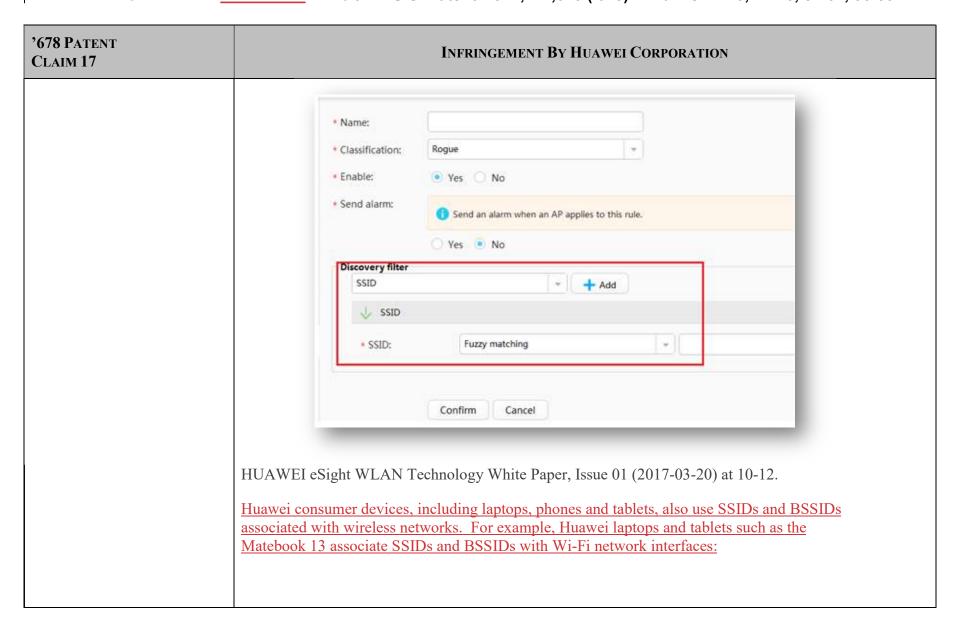

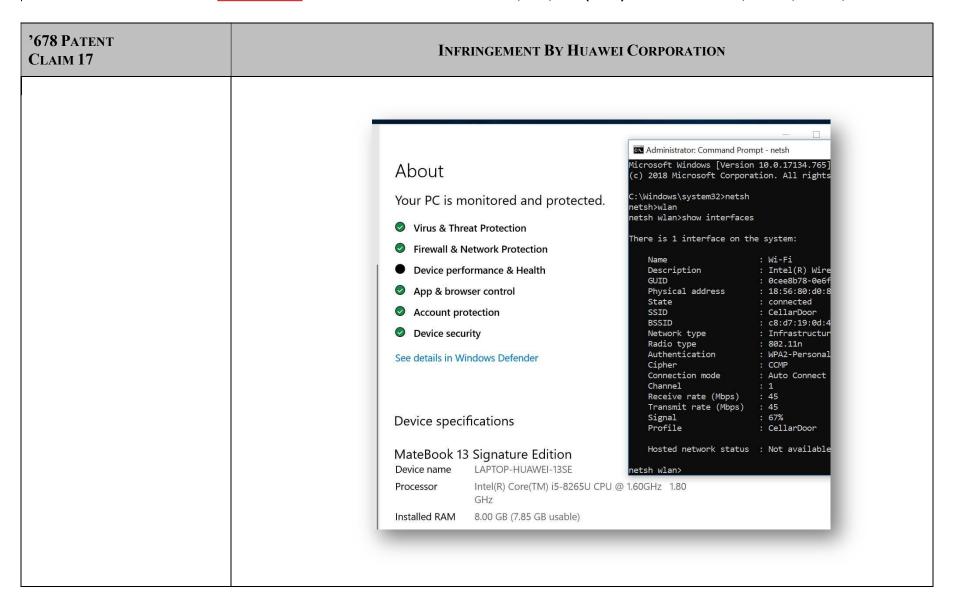



'678 PATENT CLAIM 17	Infringement By Huawei Corporation
[a] monitoring transmissions among said plurality of stations to detect service set IDs associated therewith; and	The Huawei '678 Patent Accused Products comprise a policing station that can monitor transmissions among the plurality of stations to detect service set IDs associated therewith. For example, the monitor AP collects neighbor information including SSIDs: Figure +3 Unauthorized AP deployment in a company Rogue AP 2 Rogue AP 3 Rogue AP 2 Rogue AP 3 Rogue AP 4 Rogue AP 5 Rogue AP 5 Rogue AP 5 Rogue AP 6 Rogue AP 6 Rogue AP 6 Rogue AP 7 Rogue AP 7 Rogue AP 6 Rogue AP 6 Rogue AP 7 Rogue AP 8 Rogue AP 6 Rogue AP 7 Rogue AP 8 Rogue AP 7 Rogue AP 8 Rogue AP 8 Rogue AP 8 Rogue AP 9 Rogue AP

'678 PATENT CLAIM 17	Infringement By Huawei Corporation
	causing leakage of the company's information assets. Rogue AP 2 uses the same SSID as the WLAN system of the company, and attempts to steal company information assets by forging an authorized AP and establishing connections with devices in the company.
	In this case, the WIDS and WIPS functions can be enabled on the company's WLAN to contain rogue APs using the same SSID. After the WIDS and WIPS functions are configured on the AC, the monitor AP collects information about neighboring device and reports the information to the AC. When the AC identifies a rogue AP, it notifies the monitor AP of the rogue AP's identity information. The monitor AP then uses the rogue AP's identity information to broadcast a Deauthentication frame. After STAs associating with the rogue AP receive the Deauthentication frame, they disassociate from the rogue AP. This containment mechanism prevents STAs from associating with the rogue AP. Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 22-23 (emphasis added).

'678 PATENT CLAIM 17		In	FRINGEMENT BY HUAWEI CORPORATION	
		Table 2-3 Key information about a detected wireless device		
		Attribute	Description	
		MAC address	MAC address of the device	
		BSSID	BSSID of the device	
		Type	Ad hoc device, AP, STA, or wireless bridge	
		SSID	SSID of an ESS	
		Vendor	Vendor of the device	
		Channel	Channel in which the device is detected for the last time	
		RSSI	Maximum RSSI of the device	
		Beacon Interval	Interval at which an AP or ad hoc device sends Beacon frames	
		First Detected Time	First time at which the device is detected	
		Last Detected Time	Last time when the device is detected	
	07-05) at Further, the stations to	9.		


'678 PATENT CLAIM 17	Infringement By Huawei Corporation
	The Wireless Intrusion Detection System (WIDS) manages information about rogue devices, interference resources, and attacks, and supports type-based recognition and alarm notification based on user-defined rules. Besides, the WIDS allows users to take countermeasures against unauthorized devices, ensuring wireless network security.
	Network administrators can classify and filter rogue APs and management alarms based on defined rules. Rule definition involves the following indicators: SSID, channel, field strength, impact scope, and attack behavior. Users can enable eSight to generate alarms when rogue APs in compliance with defined rules are detected.
	Same or adjacent channel
	This rule is used to detect the channel deployment of APs, and detect rogue APs that operate in the same or adjacent channel. If rogue APs operate in the same channel with normal APs, eSight regards it as same-frequency interference; if rogue APs operate in an adjacent channel, eSight regards it as adjacent-frequency interference

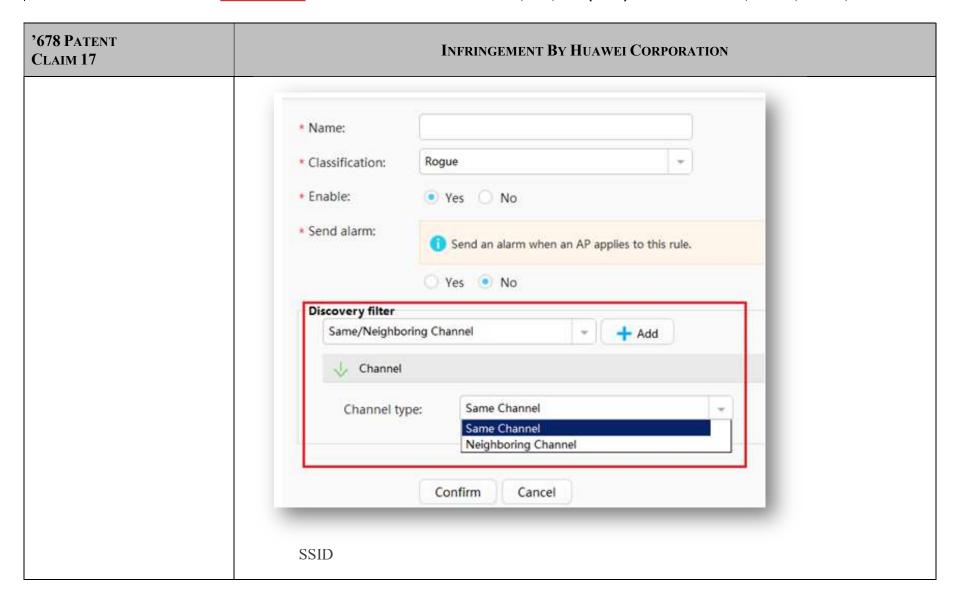

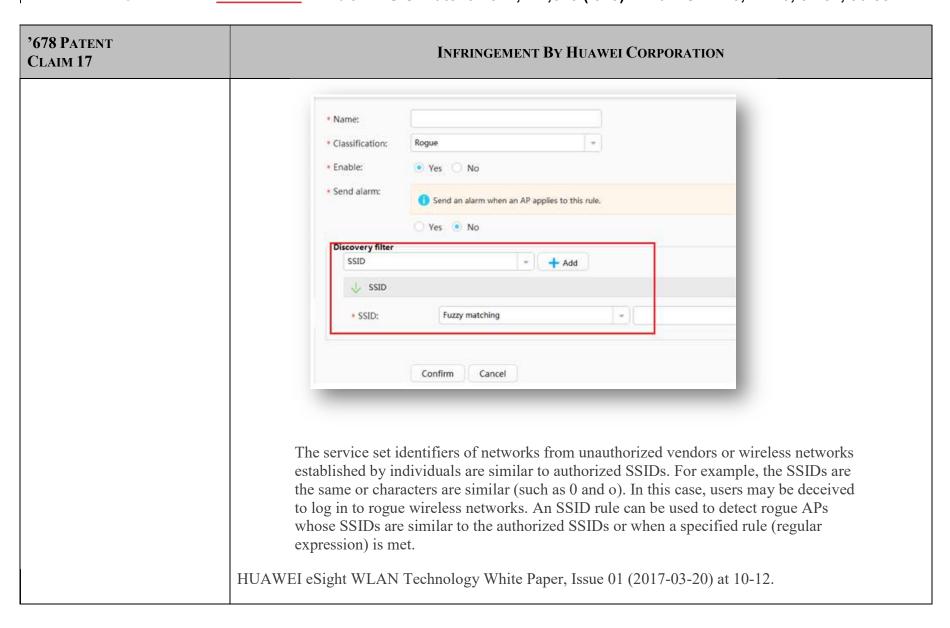

74


'678 PATENT CLAIM 17	Infringement By Huawei Corporation
	On information and belief Huawei consumer devices, including laptops, phones and tablets also can monitor for service set IDs, including when configured as a mobile hotspot.
	Huawei consumer devices, including laptops, phones and tablets implementing the security features of Huawei's EMUI operating system, including its "Wi-Fi threat detection" functionality, also monitor for service set IDs. See, e.g., EMUI 8.0 Security Technical White Paper, available at https://consumerimg.huawei.com/content/dam/huawei-cbg-site/en/mkt/legal/privacy-policy/EMUI%208.0%20Security%20Technology%20White%20Paper.pdf, at 15 ("Wi-Fi connection can be authenticated using various methods, such as WEP, WPA/WPA2 PSK, 802.1x EAP, WPS, and WAP" and "EMUI provides Wi-Fi threat detection engine on access points. It detects the Wi-Fi to be connected. Once security risks are detected, it will notify users so that they can take measures to ensure connection security.")
[b] generating an intrusion alert based upon one of the detected service set IDs being different than the at least one service set ID of the wireless network.	The Huawei '678 Patent Accused Products generate an intrusion alert based upon one of the detected service set IDs being different than the at least one service set ID of the wireless network. For example, when an AP's SSID is different than the SSID of the WLAN, it may be considered a Rogue AP and a Rogue AP alarm is generated.

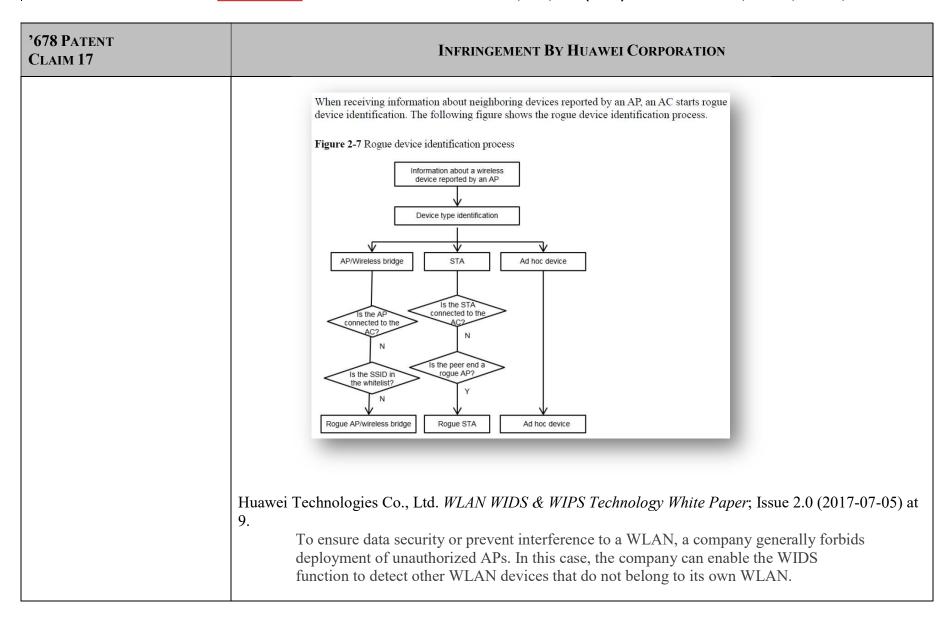

'678 PATENT CLAIM 17	Infringement By Huawei Corporation
	Figure 4.3 Unauthorized AP deployment in a company AP Rogue AP 1 SSID = Corp Rogue AP 2 SSID = Corp SSID = Corp SSID = Corp STA C
	As shown in the preceding figure, employees deploy unauthorized APs (rogue APs 1 and 2, which are Fat APs or smart terminals with the AP function enabled) to the WLAN of a company. Rogue AP 1 uses the SSID Jack and provides wireless services for an employee's own STA (such as a tablet). The company's WLAN may be interfered, causing leakage of the company's information assets. Rogue AP 2 uses the same SSID as the WLAN system of the company, and attempts to steal company information assets by forging an authorized AP and establishing connections with devices in the company.

'678 PATENT CLAIM 17	Infringement By Huawei Corporation
	In this case, the WIDS and WIPS functions can be enabled on the company's WLAN to contain rogue APs using the same SSID. After the WIDS and WIPS functions are configured on the AC, the monitor AP collects information about neighboring device and reports the information to the AC. When the AC identifies a rogue AP, it notifies the monitor AP of the rogue AP's identity information. The monitor AP then uses the rogue AP's identity information to broadcast a Deauthentication frame. After STAs associating with the rogue AP receive the Deauthentication frame, they disassociate from the rogue AP. This containment mechanism prevents STAs from associating with the rogue AP.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 22-23.
	Rogue APs: Currently, Huawei WLAN devices support containment againstrogue APs with bogus SSIDs.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 11.
	If the device type is AP or wireless bridge, the AC first checks whether it is an authorized device. If the BSSID of the device is the same as that of another device currently managed by the AC, it is an authorized device. Otherwise, the identification continues. If the SSID of the device (such as CMCC) is in the SSID whitelist configured by the administrator, it is an authorized device. Otherwise, the device is identified as a rogue device.
	When the AC identifies an AP as a rogue AP, a rogue AP alarm is triggered and sent to the network management system (NMS) in an SNMP trap.

'678 PATENT CLAIM 17	Infringement By Huawei Corporation
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 10.
	Further, the eSight White Paper describes using WIDS and generating an alarm based upon one of the detected service set IDs being different than the at least one service set ID of the wireless network:
	SSID
	The service set identifiers of networks from unauthorized vendors or wireless networks established by individuals are similar to authorized SSIDs. For example, the SSIDs are the same or characters are similar (such as 0 and 0). In this case, users may be deceived to log in to rogue wireless networks. An SSID rule can be used to detect rogue APs whose SSIDs are similar to the authorized SSIDs or when a specified rule (regular expression) is met.

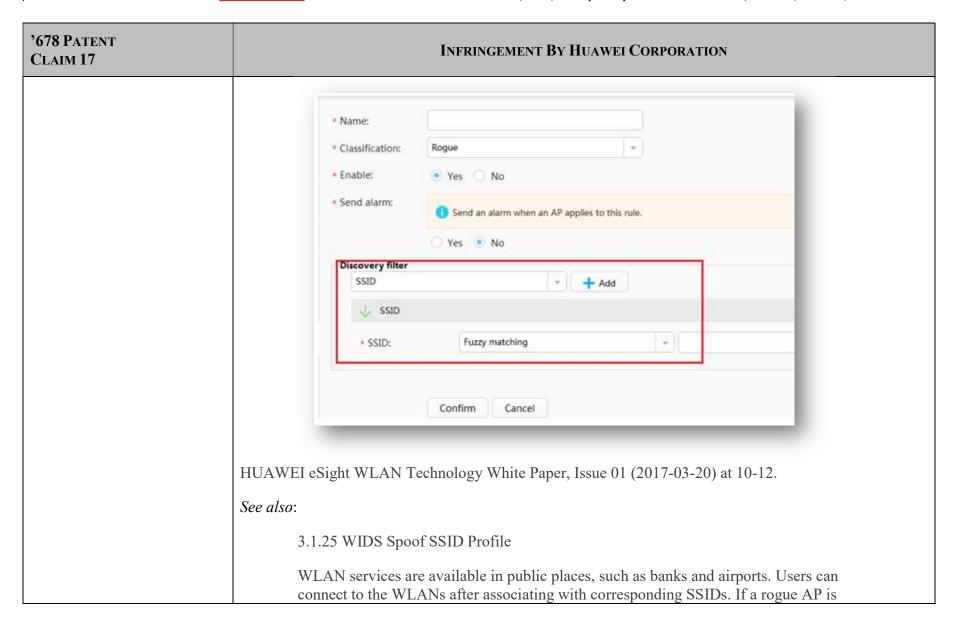

'678 PATENT CLAIM 17	Infringement By Huawei Corporation
	deployed and provides spoofing SSIDs similar to authorized SSIDs, the users may be misled and connect to the rogue AP, which brings security risks. To address this problem, configure a fuzzy matching rule to identify spoofing SSIDs. The device compares a detected SSID with the matching rule. If the SSID matches the rule, the SSID is considered a spoofing SSID. The AP using the spoofing SSID is a rogue AP. After rogue AP containment is configured, the device contains the rogue AP and disconnects users from the spoofing SSID.
	For the detailed configuration, see (Optional) Configuring Fuzzy Matching Rules for Identifying Spoofing SSIDs in the Configuration-WLAN Security Configuration Guide.
	HUAWEI WLAN Typical Configuration Examples, Issue 01 (2017-12-29) at 33.
	On information and belief Huawei consumer devices, including laptops, phones and tablets also can generate an intrusion alert based on monitoring for different service set IDs, including when configured as a mobile hotspot.
	Huawei consumer devices, including laptops, phones and tablets implementing the security features of Huawei's EMUI operating system, including its "Wi-Fi threat detection" functionality, also generate an intrusion alert based on monitoring for different service set IDs. See, e.g., EMUI 8.0 Security Technical White Paper, available at https://consumer-img.huawei.com/content/dam/huawei-cbg-site/en/mkt/legal/privacy-policy/EMUI%208.0%20Security%20Technology%20White%20Paper.pdf, at 15 ("Wi-Fi connection can be authenticated using various methods, such as WEP, WPA/WPA2 PSK, 802.1x EAP, WPS, and WAP" and "EMUI provides Wi-Fi threat detection engine on access points. It detects the Wi-Fi to be connected. Once security risks are detected, it will notify users so that they can take measures to ensure connection security.").

'678 PATENT INFRINGEMENT BY HUAWEI CORPORATION CLAIM 18 18. The wireless network of The Huawei '678 Patent Accused Products infringe this claim. See Claim 12. Further, said plurality of claim 12 wherein said plurality stations transmit data over at least one channel; and wherein said policing station further detects of stations transmit data over transmissions over the at least one channel not originating from one of the plurality of stations (e.g., neighboring devices) and generates an intrusion alert based thereon. at least one channel; and wherein said policing station For example: further detects transmissions over the at least one channel not originating from one of the Figure 2-2 Principles of the two working modes plurality of stations and generates an intrusion alert Normal mode based thereon. The WISD and WIPS functions and other air interface scan functions are disabled. Channel The WISD and WIPS functions are enabled. Channel Ch2 Channel Monitoring period Monitor mode Channel Channel Long monitoring period: N x Monitoring period for each channel (Nindicates the number of monitored channels.) Rogue devices are detected in all the channels of the frequency band on which the current radio works, or channels allowed by a specified country code.

'678 PATENT CLAIM 18	Infringement By Huawei Corporation
	2.2.2 Wireless Device Identification
	On WLANs, APs, STAs, ad hoc devices, and wireless bridges need to be monitored. When an AP working in normal mode with air interface scan functions enabled on radios or in monitor mode, it can identify the types of neighboring wireless devices based on detected 802.11 management and data frames. The wireless device identification process is as follows:
	1. On the AC, the AP is configured to work in monitor mode or in normal mode with air interface scan functions enabled on radios.
	2. The AC delivers the configuration to the AP.
	3. The AP scans channels to collect information about neighboring wireless devices, and listens on frames sent by neighboring wireless devices to identify device types. The AP listens on the following types of frames:
	 Beacon Association Request Association Response Reassociation Request Reassociation Response Probe Response Data frame
	4. The AP reports the identified device types to the AC. The AC then determines whether the identified devices are authorized and notifies the AP of rogue devices.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 4.

'678 PATENT CLAIM 18	Infringement By Huawei Corporation
	Further, monitor APs monitor neighboring channels and detect transmissions of neighboring wireless devices. If these devices are determined to be Rogue APs, an intrusion alert is generated.
	 Rogue AP: an unauthorized or malicious AP, which can be an AP that is connected to a network without permission, an unconfigured AP, a neighbor AP, or an AP manipulated by an attacker
	 Monitor AP: an AP that scans or listens on wireless channels and attempts to detect attacks to the wireless network.
	Huawei Technologies Co., Ltd. <i>WLAN WIDS & WIPS Technology White Paper</i> ; Issue 2.0 (2017-07-05) at 2; <i>see also</i> WLAN WIDS Technology White Paper, Issue 1.0 (2014-04-24) at 3.
	2.2 Rogue Device Detection
	Rogue device detection of WLANs is enabled to monitor the entire network. Monitor APs are deployed on a WLAN that needs protection to monitor the entire network. The monitor APs can periodically listen on wireless signals to detect rogue devices.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 3.
	After the WIDS and WIPS functions are configured on the AC, the monitor AP collects information about neighboring device and reports the information to the AC. When the AC identifies a rogue AP, it notifies the monitor AP of the rogue AP's identity information.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 23.


'678 PATENT CLAIM 18	Infringement By Huawei Corporation
	When the AC identifies an AP as a rogue AP, a rogue AP alarm is triggered and sent to the network management system (NMS) in an SNMP trap.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 10.
	As further described in the eSight documentation:
	3.2.3 WIDS Wireless Intrusion Detection System
	The Wireless Intrusion Detection System (WIDS) manages information about rogue devices, interference resources, and attacks, and supports type-based recognition and alarm notification based on user-defined rules. Besides, the WIDS allows users to take countermeasures against unauthorized devices, ensuring wireless network security.
	Network administrators can classify and filter rogue APs and management alarms based on defined rules. Rule definition involves the following indicators: SSID, channel, field strength, impact scope, and attack behavior. Users can enable eSight to generate alarms when rogue APs in compliance with defined rules are detected.
	Same or adjacent channel

'678 PATENT CLAIM 18	Infrin	NGEMENT BY HUAWEI CORPORATION
	operate in the same or adjace normal APs, eSight regards i	e channel deployment of APs, and detect rogue APs that ent channel. If rogue APs operate in the same channel with t as same-frequency interference; if rogue APs operate in an erds it as adjacent-frequency interference
	* Name:	
	* Classification:	Rogue
	* Enable:	• Yes O No
	* Send alarm:	1 Send an alarm when an AP applies to this rule.
		○ Yes ● No
	Discovery filter Same/Neighbor	ring Channel + Add
	↓ Channel	
	Channel typ	Same Channel Same Channel Neighboring Channel
		Confirm Cancel
	HUAWEI eSight WLAN Technology	White Paper, Issue 1.0 (2017-03-20) at 10-12.
	generate an intrusion alert based on de	nsumer devices, including laptops, phones and tablets also can etecting transmissions over the at least one channel not originating including when configured as a mobile hotspot.

'678 PATENT CLAIM 18	Infringement By Huawei Corporation
	Huawei consumer devices, including laptops, phones and tablets implementing the security features of Huawei's EMUI operating system, including its "Wi-Fi threat detection" functionality, also generate an intrusion alert based on detecting transmissions over the at least one channel not originating from one of the plurality of stations. <i>See, e.g.</i> , EMUI 8.0 Security Technical White Paper, available at https://consumer-img.huawei.com/content/dam/huawei-cbg-site/en/mkt/legal/privacy-policy/EMUI%208.0%20Security%20Technology%20White%20Paper.pdf , at 15 ("Wi-Fi connection can be authenticated using various methods, such as WEP, WPA/WPA2 PSK, 802.1x EAP, WPS, and WAP" and "EMUI provides Wi-Fi threat detection engine on access points. It detects the Wi-Fi to be connected. Once security risks are detected, it will notify users so that they can take measures to ensure connection security.").

'678 PATENT CLAIM 19	Infringement By Huawei Corporation
19. The wireless network of claim 12 wherein said policing station further transmits an intrusion alert to at least one of said plurality of stations.	

 On the AC, the AP is configured to work in monitor mode or in normal mode with air interface scan functions enabled on radios. The AC delivers the configuration to the AP.
2. The AC delivers the configuration to the AP.
3. The AP scans channels to collect information about neighboring wireless devices, and listens on frames sent by neighboring wireless devices to identify device types. The AP listens on the following types of frames:
- Beacon
- Association Request
- Association Response
- Reassociation Request
- Reassociation Response
- Probe Response
– Data frame
4. The AP reports the identified device types to the AC. The AC then determines whether the identified devices are authorized and notifies the AP of rogue devices.
wei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at

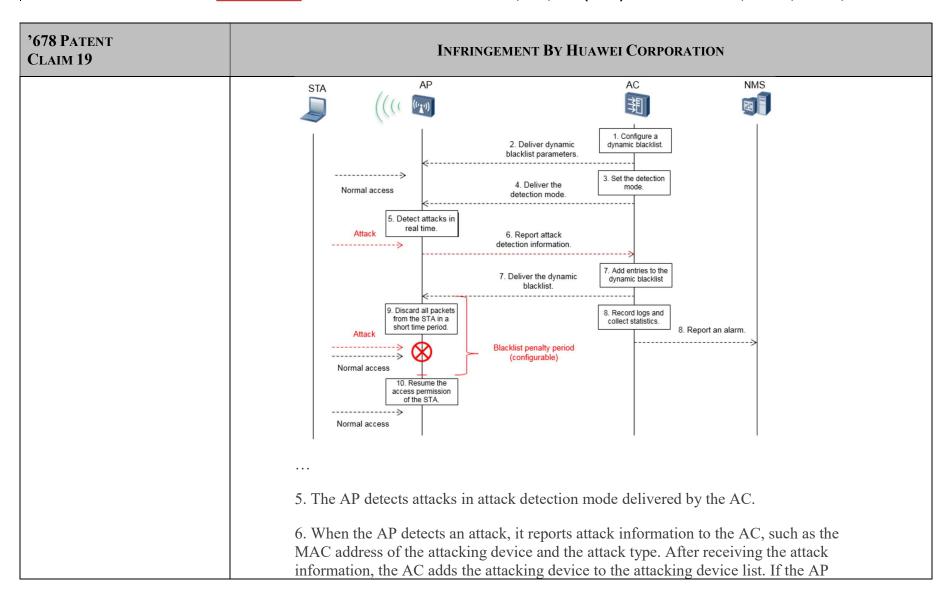

Infringement By Huawei Corporation
detects no attack from this attacking device in the next three attack detection periods, it requests the AC to delete the attacking device from the list.
7. The AC determines whether to add the attacking device to the dynamic blacklist. It records detected brute force PSK crackers to the dynamic blacklist cache table, and delivers the table to the AP.
8. The AC collects statistics on attack types and sends trap messages to report the attack types to the NMS.
9. After receiving the dynamic blacklist, the AP discards the packets from the attacking devices in the dynamic blacklist.
Huawei Technologies Co., Ltd. <i>WLAN WIDS & WIPS Technology White Paper</i> ; Issue 2.0 (2017-07-05) at 17 (emphasis added).
If so, the AP considers that the STA is using the brute force method to crack the password and reports an alarm to the AC.
Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 15.
☐ The AP listens on frames to collect information about neighboring wireless devices, and reports the information to the AC at the specified short interval. The AC then determines whether the wireless devices are rogue devices and delivers the identification result to the AP. When the wireless devices are scanned again by the AP, the AP automatically checks whether they are rogue devices based on the identification result sent by the AC.

'678 PATENT CLAIM 19	Infringement By Huawei Corporation
	☐ The AP reports full information about all detected wireless devices to the AC at the long interval for information synchronization. The AC then determines whether the wireless devices are rogue devices and delivers the identification result to the AP. When the wireless devices are scanned again by the AP, the AP automatically checks whether they are rogue devices based on the identification result sent by the AC.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 8.
	On information and belief Huawei consumer devices, including laptops, phones and tablets also can transmit intrusion alerts, including when configured as a mobile hotspot.
	Huawei consumer devices, including laptops, phones and tablets implementing the security features of Huawei's EMUI operating system, including its "Wi-Fi threat detection" functionality, also transmit intrusion alerts. See, e.g., EMUI 8.0 Security Technical White Paper, available at https://consumerimg.huawei.com/content/dam/huawei-cbg-site/en/mkt/legal/privacy-policy/EMUI%208.0%20Security%20Technology%20White%20Paper.pdf, at 15 ("Wi-Fi connection can be authenticated using various methods, such as WEP, WPA/WPA2 PSK, 802.1x EAP, WPS, and WAP" and "EMUI provides Wi-Fi threat detection engine on access points. It detects the Wi-Fi to be connected. Once security risks are detected, it will notify users so that they can take measures to ensure connection
	security.").

'678 PATENT CLAIM 20	Infringement By Huawei Corporation
20. The wireless network of claim 12 wherein said policing	The Huawei '678 Patent Accused Products infringe this claim. See Claim 12.

'678 PATENT CLAIM 20	Infringement By Huawei Corporation
station comprises a base station.	Further the policing station comprises a base station. For example, the monitor APs described above acts as a base station.
	See Claim 12

'678 PATENT CLAIM 51	Infringement By Huawei Corporation
51. An intrusion detection method for a wireless local or metropolitan area network comprising a plurality of stations, the method comprising:	The Huawei '678 Patent Accused Products infringe this claim. Huawei makes, uses, sells, offers to sell and/or imports equipment used in wireless or metropolitan local area networks (WLAN products), and on information and belief, makes, uses, sells, offers to sell and/or imports such networks in the United States. Such equipment and networks perform an intrusion detection method for a wireless local or metropolitan area network comprising a plurality of stations. See evidence for Claim 12[preamble]. The method further comprises the steps below.
[a] transmitting data between the plurality of stations using a media access layer (MAC), each of the stations having a respective MAC address associated therewith;	Huawei '678 Patent Accused Products transmit data between the plurality of stations using a media access layer (MAC), each of the stations having a respective MAC address associated therewith. See evidence for Claim 12[a].

'678 PATENT CLAIM 51	Infringement By Huawei Corporation
[b] monitoring transmissions among the plurality of stations to detect failed attempts to authenticate MAC addresses; and	Huawei '678 Patent Accused Products monitor transmissions among the plurality of stations to detect failed attempts to authenticate MAC addresses. See evidence for Claim 12[c].
[c] generating an intrusion alert based upon detecting a number of failed attempts to authenticate a MAC address.	Huawei '678 Patent Accused Products generate an intrusion alert based upon detecting a number of failed attempts to authenticate a MAC address. See evidence for Claim 12[d].

'678 PATENT CLAIM 52	Infringement By Huawei Corporation
52. The method of claim 51 wherein generating an intrusion alert based upon detecting a number of failed attempts to authenticate a MAC address comprises generating an intrusion alert based upon detecting the number of failed attempts to authenticate the MAC address within a predetermined period.	Huawei '678 Patent Accused Products infringe this claim. See Claim 51. Further, generating an intrusion alert based upon detecting a number of failed attempts to authenticate a MAC address comprises generating an intrusion alert based upon detecting the number of failed attempts to authenticate the MAC address within a predetermined period See evidence for Claim 13.

'678 PATENT CLAIM 56	Infringement By Huawei Corporation
56. The method of claim 51 wherein the wireless network has at least one service set identification (ID) associated therewith; and further comprising:	The Huawei '678 Patent Accused Products infringe this claim. <i>See</i> claim 51. Further, the wireless network has at least one service set identification (ID) associated therewith. See evidence for Claim 17[preamble].
[a] monitoring transmissions among the plurality of stations to detect service set IDs associated therewith; and	The Huawei '678 Patent Accused Products monitor transmissions among the plurality of stations to detect service set IDs associated therewith. See evidence for Claim 17[a].
[b] generating an intrusion alert based upon one of the detected service set IDs being different than the at least one service set ID of the wireless network.	The Huawei '678 Patent Accused Products generate an intrusion alert based upon one of the detected service set IDs being different than the at least one service set ID of the wireless network. See evidence for Claim 17[b].

'678 PATENT CLAIM 57	Infringement By Huawei Corporation
57. The method of claim 51 wherein transmitting data	The Huawei '678 Patent Accused Products infringe this claim. <i>See</i> claim 51. Further, transmitting data comprises transmitting data over at least one channel; and further comprising detecting transmissions over

'678 PATENT CLAIM 57	Infringement By Huawei Corporation
comprises transmitting data over at least one channel; and further comprising detecting transmissions over the at least one channel not originating from one of the plurality of stations and generating an intrusion alert based thereon.	the at least one channel not originating from one of the plurality of stations and generating an intrusion alert based thereon. See evidence for Claim 18.

'678 PATENT CLAIM 58	Infringement By Huawei Corporation
58. The method of claim 51 further comprising transmitting the intrusion alert to at least one of the plurality of stations.	The Huawei '678 Patent Accused Products infringe this claim. See Claim 51. The instrumentalities further transmit the intrusion alert to at least one of the plurality of stations. See evidence for Claim 19.